


## ST-602M

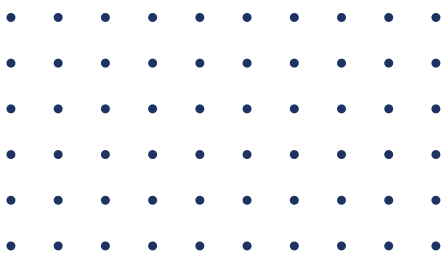

### MIFARE CARD READER

## DESCRIPTION

The **Stoneuk ST-602M** is a sleek and durable access control reader that supports both card and password authentication for enhanced security. Designed for easy installation, it can control one door from both entry and exit points. With LED access indicators and a reading range of up to 5cm, it offers reliable performance in a compact and stylish form—ideal for environments that require dual-factor verification.

## FEATURES

- ◆ READING RANGE - UP TO 5 CM
- ◆ READING TIME - <300MS
- ◆ WATERPROOF - IP64
- ◆ USER FRIENDLY
- ◆ READING FREQUENCY - 13.56 MHZ

## SPECIFICATION

- ◆ Operating Voltage - 12~18 V DC
- ◆ Operating Temperature -  
-25° C - 75° C
- ◆ Dimensions -86x86x20mm