
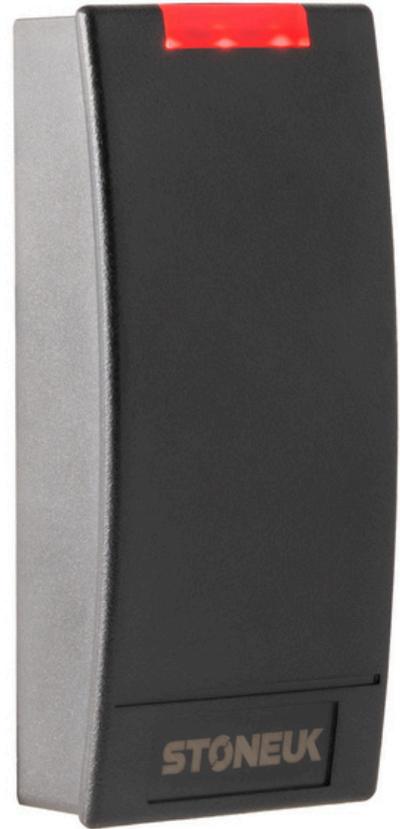


ST-610MF

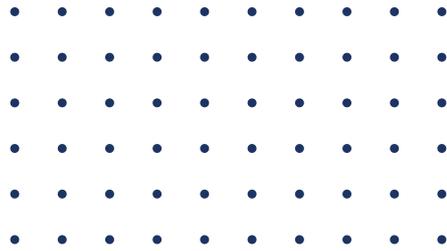

ACCESS CONTROL CARD READER

DESCRIPTION

The **ST-610MF** is a high-performance 13.56MHz Mifare card reader, offering secure and efficient access control in various environments. It delivers a read range of up to 5cm and supports Wiegand 26/34 bit output. The waterproof IP65 rating and epoxy-sealed design ensure reliable operation in both indoor and outdoor settings. It features external LED and buzzer controls, and its slim form factor allows for easy installation on door frames or mullions.


FEATURES

- ◆ READING RANGE - UP TO 5CM
- ◆ READING TIME - <300MS
- ◆ WATERPROOF - IP65
- ◆ SOLID EPOXY POTTED
- ◆ READING FREQUENCY - 13.56MHZ

SPECIFICATION

- ◆ Operating Voltage - DC 6-14V
- ◆ Operating Temperature - -20° to +65°C
- ◆ Dimensions - 100X46X20mm
- ◆ Weight - 50 g

TECHNICAL SPECIFICATION

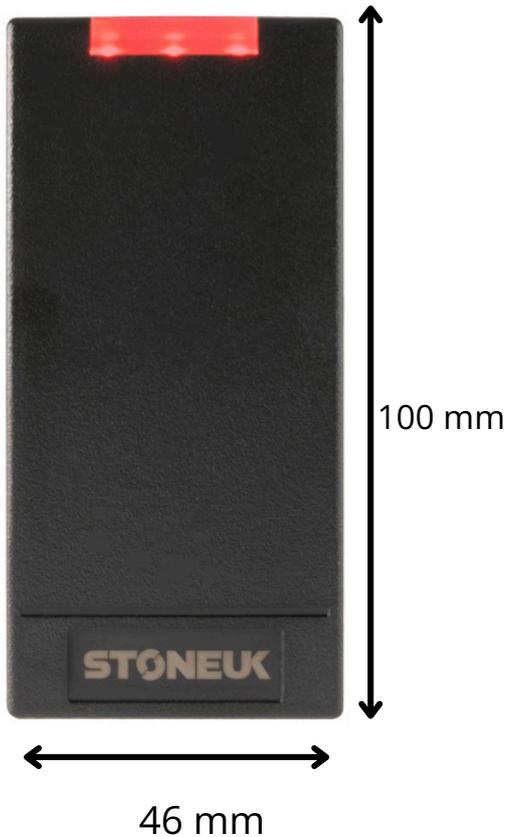

1	Add-in Reader Interface	WG26 interface
2	Electric lock output:	Max 3A
3	Alarm output	Max 20A
4	Input Port	2ea
5	LED Indicator	2 Color LED Indicators (Red and Green)

ST-610MF

- SUPPORTS 13.56MHZ MIFARE CARDS
- READ RANGE: UP TO 5CM
- WIEGAND 26/34-BIT OUTPUT (DEFAULT)
- IP65 WATERPROOF – IDEAL FOR HARSH ENVIRONMENTS
- DESIGNED FOR EASY INSTALLATION ON DOOR FRAMES OR MULLIONS
- EXTERNAL LED AND BUZZER CONTROL
- REVERSE POLARITY PROTECTION
- SECURE AND EFFICIENT FOR MODERN ACCESS CONTROL SYSTEMS