



STONEUK - ST-AC40ID

The ST-AC40ID is standalone access control. It supports access by RFID card, PIN, and multiple users and also supports visiting users. The user data can be transferred and copied into other devices. Other functions supported include door contact, the ability to interlock 2 devices, and anti-duress. It can also be set as a Wiegand reader to work with the access controller.


KEY FEATURES

- Card and Password Access Methods
- User Data can be Transferred
- Waterproof
- Integrated LED Indicators and Buzzer Control
- Contactless Card Reading
- Support up to 3,000 Users, 5 Visitors

PRODUCT PARAMETERS

Access Methods	Card and Password
Reading Range	Up To 10 cm
Reading Time	< 300 ms
IP Rating	IP66
Operating Voltage	10 - 24 V DC
Operating Temperature	-40° to 60° C
Output short-circuitprotection time	Max 0.1 ms
Card Type	EM/Mifare/EM+Mifara Card
Reading Frequency	125 KHz
Electric Lock Output	Max 2A
Alarm Output	Max 500mA
User Capacity	3,000 Users, 5 Visitors

DIMENSION

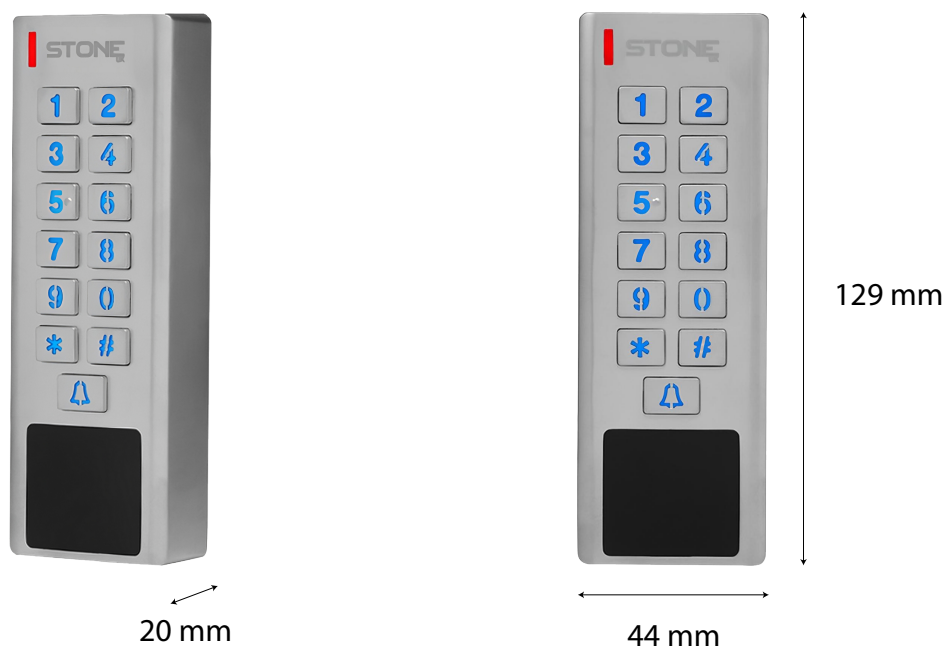

Get in Touch 

+44 2080 773081

 info@thestoneuk.com

 www.thestoneuk.com