



## STONEUK - ST-RR2

The ST-RR2 is a versatile two-channel wireless RF remote control receiver designed for reliable and secure remote switching applications. Operating at 433.92 MHz or 315 MHz, it features a robust metallic casing and supports a learning code system, allowing easy pairing with compatible remote transmitters. Powered by a 12V DC supply, the receiver offers a stable control range of 50 to 100 meters in open environments. Ideal for controlling garage doors, gate openers, lighting, or other automation systems, the ST-RR2 delivers dependable performance with user-friendly setup and durable construction.


### KEY FEATURES

- A Versatile Two-Channel Wireless RF Remote Control Receiver
- Supporting Both 433.92 Mhz and 315 Mhz Frequencies
- Supports Learning Code System
- Ideal for Controlling Garage Doors, Gate Openers, Lighting, or Other Automation Systems
- It Features a Robust Metallic Casing
- Transmission Range of 50 to 100 Meters in Open Environments

## PRODUCT PARAMETERS

Button	1/2/3/4 Buttons
Encoding Type	Learning Code
Material	ABS, Metal
Range	50 to 100 m
Frequency	433.92MHz and 315MHz
Input	12 V DC
Oscillation Resistance	340K
Output Terminal	No / Nc / Com

## DIMENSION

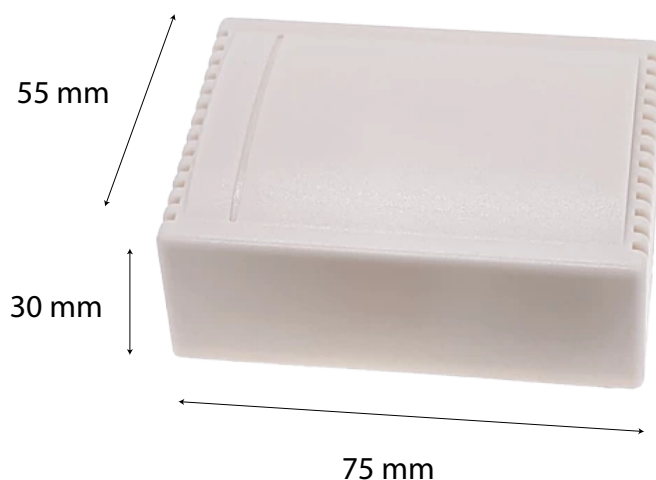

**Get in Touch** 

 +44 2080 773081

 [info@thestoneuk.com](mailto:info@thestoneuk.com)

 [www.thestoneuk.com](http://www.thestoneuk.com)